


## PBE PROFESSIONAL PRIMERS

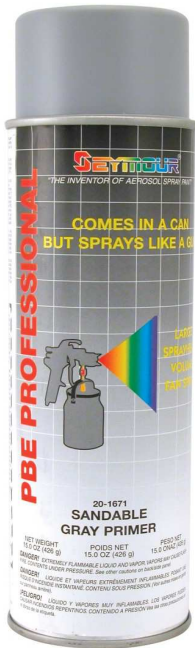

A professional grade primer specifically formulated to meet the performance needs of body shop personnel. Sandable in 5 minutes, this primer adheres extremely well to bare metal surfaces. Very good protection against rust and corrosion. The large fan sprayhead eliminates the need for a spray gun on small repair jobs, and reduces your cleanup time.

### Suggested Uses:

body panels  
engine parts  
metal structures  
aviation parts  
heavy machinery

### Packaging:

Cans per case	6
Shipping weight per case	9 lbs.
Container	20 fluid ounce can
Label weight	15 ounces (425 grams)
Shipping Classification	Consumer Commodity ORM-D, UN 1950
Hazard Class	2.1

### Properties:

Coverage	Up to 18 square feet
Cleanup	Paint or lacquer thinner
Flammability	Extremely Flammable
Flash point	-4F
Specific Gravity	0.78
Solids Content	17%
MIR value	0.60, cannot exceed 0.70
HAPs content	3%
Storage Temperature	40-100F
Application Temperature	50-90F
Topcoat	10 minutes
Gasoline Resistance	No
Heat Resistance	250F
Resin System	Nitrocellulose lacquer
Shelf life	Guaranteed for 2 years

### Dry Time\*:

To touch	5 minutes
Sandable	5 minutes

\*At 72F, 50% humidity,  
1.5 mil thickness

\*\*Curing/Recoat time is extended with  
multiple coats and excessively thick coats\*\*

**Gloss\*:** Flat, <15

\*as measured on a 60 degree gloss meter

### Available Colors:

<u>Part #</u>	<u>Description</u>	<u>UPC Code</u>
20-1671	Light Gray	043281002196
20-1672	Black	043281002202
20-1673	Red Iron Oxide	043281002219